

VOICE COIL DESKTOP SPEAKER V-5330110

INTRODUCTION

The Desktop Speaker is a completely assembled speaker unit for use with Voice Coil paging systems. Each speaker is equipped with 6-foot speaker wire.

SPECIFICATIONS

FEATURES

- Volume Control
- Talkback

Dimensions/Weight


- 4.75"W x 1.75"H x 6.88"D
(12.07cm X 4.5cm X 17.48cm)
- 3.0 lbs (1.4 kg)

OPERATION

The Desktop Speaker is recommended for use with all PagePac[®] Voice Coil paging systems (or equivalent systems) in which talkback is provided (talkback is two-way communication between the paging telephone and the paging loudspeaker). However, the Desktop Speaker may be used without talkback.

It is recommended that each Desktop Speaker, when used with talkback, be a separate paging zone. If this is not feasible, the total number of Desktop Speakers in any one zone should be limited to two or less.

When installing PagePac Voice Coil Desktop Speaker, be sure to use "B" or any similar crimping type connectors only. This will ensure a solid connection that will not pull free or become intermittent (see Figure 1).



VOLUME CONTROL

The "VOL" control adjusts the speaker volume in both the page and music modes (see Figure 1). It does not affect the talkback level.

INSTALLATION

Place the Desktop Speaker in the desired location.

Connect the speaker cord to the speaker cable run. The speaker run to which the Desktop Speaker is connected must be connected to the Voice Coil output of the PagePac 6 and PagePac 6 Plus.

TESTING

Access the Desktop Speaker and ensure that paging occurs. While a page is in progress, adjust the speaker volume with the VOL control.

Note: Generally, music volume should be adjusted at the music source or on the PagePac 6 and PagePac 6 Plus MUSIC VOLUME control.

TECHNICAL ASSISTANCE

When calling, have a VOM and a telephone test set available and call from the job site. Call (540) 563-2000 and ask for PagePac Technical Support, or visit our websites at <http://www.pagepac.com> and www.valcom.com.

Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person, and the nature of the problem. Send the unit to:

Valcom, Inc.
PagePac® Repair Dept.
5614 Hollins Road
Roanoke, VA 24019-5056

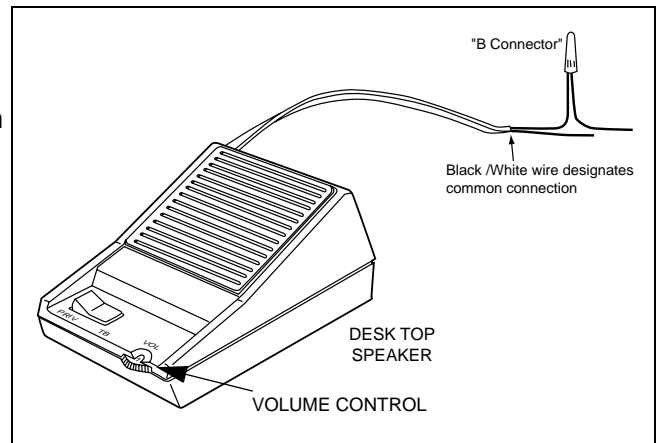


Figure 1